

[Home](#) > [Support](#) > [Disc](#)

ST15150N Illustrated Configuration

Related Links

- > [Installation Guide](#)
- > [Installation Software](#)
- > [Diagnostic Software](#)
- > [Product Manual](#)
- > [SCSI-2/SCSI-3 Interface Manual](#)
- > [Specification Page](#)

Capacity:4.29 GB
Speed:7200 rpm
Seek time:9 ms

SeaFAX#:151506

Disc Drive Encyclopedia


- > [by Model Number](#)
- > [by Interface](#)
- > [by Product Family](#)
- > [Interpreting Model Numbers](#)




Tape Drive Encyclopedia

- > [by Model Number](#)
- > [by Cartridge Format](#)
- > [by Interface](#)
- > [Interpreting Model Numbers](#)


Glossary

Index of all terms

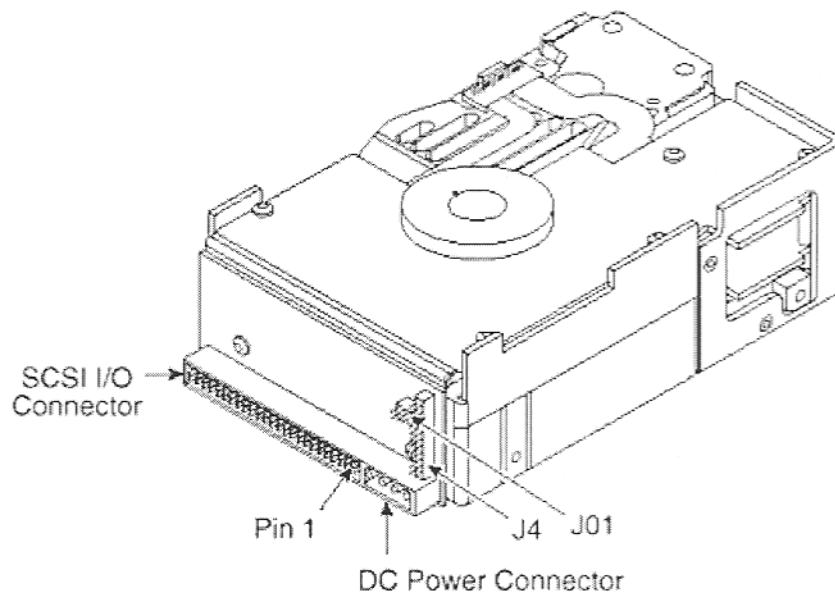

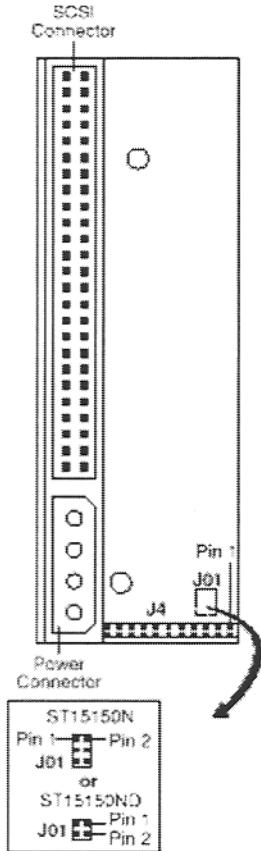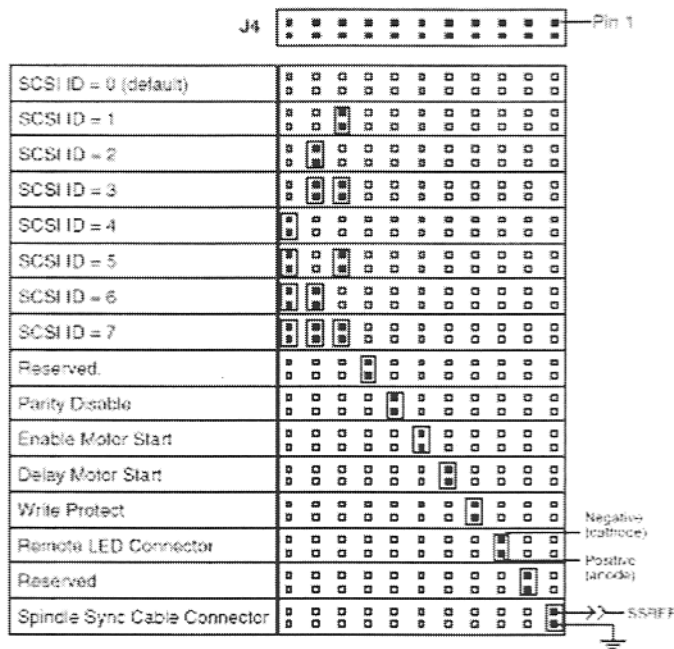

| | | |
|---|--|--|
| Term. power to SCSI bus. | | |
| Host adapter or other device provides term. power to external terminator. | | |



| | |
|------------------------------------|--|
| Term. power from drive. | |
| Term. power from SCSI bus. | |
| Term. power to SCSI bus. | |
| Term. power to SCSI bus and drive. | |
| Enable drive terminator. | |
| Disable drive terminator. | |